

TRF-958

Multistandard Test Pattern Generator *Datasheet*



DVB-T, DVB-C, DVB-S
MPEG2 TS (PS/ VES/ AES)
HDMI 1.3 and DVI-I

Digital Video Generator (ITU-BT.601/656)

PAL, SECAM, NTSC and all substandards
Teletext, Closed captions, VPS

All Analog Video Outputs, Audio Interface
TV RF Modulator NICAM

User Patterns And Test Signals, Motion Simulator

USB 2.0 Interface, RS-232 Port + User I/O Pins

1 Technical specification

Display	LCD 2x24 Characters, LED Backlight
Control	Buttons on front panel IR Remote Control USB Interface, RS-232 Interface, User input and output pin
Setup	Menu, 40 presets, Automatic mode (periodical switching of enabled presets)
TV standards	PAL, NTSC, SECAM and all substandards
Picture format	4/3, 14/9, 16/9
TV lines count	625/ 50 Hz, 525/ 60 Hz
Scanning	Interlaced, non-interlaced
Colour subcarrier	According to PAL, SECAM or NTSC standard Non-standard frequency support (defined by user, 8 types)
Teletext	Enhanced teletext (ETS300706, 6.9375 Mb/s), Tool for teletext design World Standard Teletext (WST, 5.7272 Mb/s) North-American BroadcastText System (NABTS, 5.7272 Mb/s)
Closed caption	Line 21, EIA-608, 2 bytes per field, both 50/60 Hz systems, programmable
Wide screen signalling	Line 23, EN-300294
VPS	Line 16, ETS-300231, 40 bits programmable
Test patterns	Primary patterns (suitable for all TV systems) & Extended patterns (specific) 128 or more default test patterns (limited by installed memory only) All patterns can be modified by user, Tool for pattern design
Motion patterns	Motion simulation (horizontal pattern moving, speed from slow to fast)
Generation method	TRUE PICTURE technology (max.TV system resolution)
Inputs & Outputs	
CVBS (Video)	75 ohm, level 1,2 Vpp (colour bars 100/0/100/0), level 1 Vpp (colour bars 75/0/75/0)
S-Video	
Y (luminance)	75 ohm, level 1 Vpp (colour bars 100/0/100/0)
CHROMA (chrominance)	75 ohm, level 0,6 Vpp (colour bars 100/0/100/0)
R (red)	75 ohm, level 0,7 Vpp (colour bars 100/0/100/0)
G (green)	75 ohm, level 0,7 Vpp (colour bars 100/0/100/0)
B (blue)	75 ohm, level 0,7 Vpp (colour bars 100/0/100/0)
C _R , Y, C _B	RGB outputs can be switched to color difference mode, levels are adjustable
Sync	Composite sync (typ. 1Vpp on CVBS output), H and V pulses (LVTTTL 3.3V)
Audio	2 audio outputs (typ. 1.1Vrms/10k, level, frequency and shape is adjustable) 2 channel audio input, typ. level: 1.55 Vrms/ 1 kOhm
Digital Video Output	8 bit data stream output, 4:2:2 format, parallel according to ITU-BT.656/601 Additional signals (H and V sync, data clock), LVTTTL 3.3V
PC Interface	USB 2.0, Drivers for W98 & Windows XP, SDK on request for devolepers
Control port	RS-232 duplex channel for instrument control from user application Optically insulated input pin and output pin (1+1), custom function 5V/50mA & 3V/ 30mA Power source for external application
Power supply	
DC version, 12V	12.5 - 16V/ max. 2.1 A (dependent on configuration), DC power plug 2.1 mm (<i>Certified AC/ DC stabilized power adapter as default accessories</i>)
AC version	220-240 V/ 50-60 Hz, typ. 18 W (operation), typ. <1 W (standby) (Version for 110-120 V/ 50-60 Hz available on special request) Connector type: IEC-320 (PC type power inlet)
Dimensions (WxHxD)	432 x 43 x 203 [mm], 17 x 1.7 x 8 [inch], fixing parts for 19" rack system
Weight	Typ. 2.0 kg (dependent on configuration)

1.1 HDMI

HDMI output Connector Signal	HDMI type A, 19 pin 4 channels, Differential type, HDMI 1.3 compatible Audio stream available only with option „MPEG”, see Note 1
DVI-I output Connector Signal	DVI female, 29 pin 4 channels, Differential type
Important note	One of the both connectors can be used at the same time. The module can be switched either to HDMI mode (for HDMI output) or to DVI mode (for DVI output).

1.2 MPEG2

MPEG 2 General information	Encoding and multiplexing of video and audio according to the MPEG-2 standard ISO-138181
Output formats	MPEG-2 Transport Stream (TS) MPEG-2 Program Streams (PS) Packetized Elementary Streams (PES) Elementary Streams (ES, AES/ VES)
TS/ PS Stream bit rate Video compression Video bit rate	Up to 27 Mbps, programmable parameters Programmable parameters, Variable bit rate and Constant bit rate (VBR/CBR) Up to 25 Mbps (I-frames encoded), up to 15 Mbps (IP and IPB-frames)
LVDS Output	TS Parallel, LVDS synchronous interface according to DVB A010 All output formats supported (TS/ PS/ PES/ AES/ VES) <i>Note: See connector description for detail pinout.</i>
Output differential voltage Offset voltage High output voltage Low output voltage	typ. 340 mV (250..450 mV) at 100 Ohm load typ. 1.25 V typ. 1.4 V (max. 1.65 V) typ. 1.05V (min. 0.85V)
LVTTTL Output	All output formats supported (TS/PS/PES/AES/VES) I2S audio and additional clock signals <i>Note: Internal connector by default, MLW26 type (ask SDK kit for description). Can be placed instead of LVDS connector on front panel or on rear panel (on special request only).</i>
Output level H ($I_{OH} = -2mA$) Output level L ($I_{OL} = 2mA$)	typ. 2.4 V typ. 0.4 V
I2S Audio Master clock Sampling frequency	24 bits, 2 channel 256fs 48 kHz

1.3 DVB-T/ce (Optional)

DVB-T/ce module	
Constellation	QPSK, QAM16, QAM64
Modulation error rate (MER)	>35 dB
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Guard interval	1/4, 1/8, 1/16, 1/32
IFFT Mode	2 k
Bandwidth	5, 6, 7 and 8 MHz
RF Output level	typ.100 dBμV (at 50 Ohm load)
RF Frequency	400..565 MHz (250 kHz step) <i>Also available on special request: Version 315..455 MHz, 575..712 MHz and 1150..1425 MHz</i>

Note 1: This module is suitable for applications, where the output spectrum can contain harmonics (RF output tunable filter is not applied). Don't use the module for broadcasting, but it is cost effective solution for many service, test and laboratory applications.

1.4 DVB-C/ce (Optional)

DVB-C/ce module	
Constellation	QAM16, QAM32, QAM64, QAM128, QAM256
Modulation error rate (MER)	>36 dB
Symbol rate	1000...7000 kSymbol/s (1 kSymbol step)
RF Output level	typ.107 dBμV (at 50 Ohm load)
RF Frequency	400..565 MHz (in steps of 250 kHz) <i>Also available on special request: Version 315..455 MHz, 575..712 MHz and 1150..1425 MHz</i>

Note 1: This module is suitable for applications, where the output spectrum can contain harmonics (RF output tunable filter is not applied). Don't use the module for broadcasting, but it is cost effective solution for many service, test and laboratory applications.

1.5 DVB-S/ce (Optional)

DVB-S/ce module	
Constellation	QPSK
Modulation error rate (MER)	>25 dB
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Symbol rate	1...45 MSymbol/s (1 kSymbol step)
RF Output level	typ.110 dBμV (at 50 Ohm load)
RF Frequency	400..565 MHz (250 kHz step) <i>Also available on special request: Version 315..455 MHz, 575..712 MHz and 1150..1425 MHz</i>

Note 1: This module is suitable for applications, where the output spectrum can contain harmonics (RF output tunable filter is not applied). Don't use the module for broadcasting, but it is cost effective solution for many service, test and laboratory applications.

1.6 DVB-T (Optional)

DVB-T module	EN300744 standard
Constellation	QPSK, QAM16, QAM64
Modulation error rate (MER)	>40 dB
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Guard interval	1/4, 1/8, 1/16, 1/32
IFFT Mode	2 k, 8 k
Bandwidth	6, 7 and 8 MHz
IF Output level	typ. 80..95 dB μ V (at 50 Ohm load)
IF Frequency	3.5..70 MHz (125 kHz step)
Band converter	
RF Output level	105..121 dBuV (at 50 Ohm load, adjustable)
RF Frequency	450..866 MHz (250 kHz step) <i>Also available on special request: Version VHF 50..450 MHz</i>

1.7 DVB-C (Optional)

DVB-C module	
Constellation	QAM16, QAM32, QAM64, QAM128, QAM256
Modulation Error Rate (MER)	>39 dB
Symbol rate	1000...7000 kSymbol/s (1 kSymbol step)
IF Output level	typ.80..95 dB μ V (at 50 Ohm load)
IF Frequency	3.5..70 MHz (in steps of 125 kHz)
Band converter	
RF Output level	105..121 dBuV (at 50 Ohm load, adjustable)
RF Frequency	450..866 MHz (250 kHz step) <i>Also available on special request: Version VHF 50..450 MHz</i>

1.8 DVB-S (Optional)

DVB-S module	
Constellation	QPSK
Modulation Error Rate (MER)	>29 dB
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Symbol rate	1...45 MSymbol/s (1 kSymbol step)
IF output level	typ. 90 dB μ V (at 50 Ohm load)
IF Frequency	3.5..70 MHz (125 kHz step)
Band converter	<i>Not available now</i>

1.9 TV RF Modulator NICAM (Optional)

TV output	
Standards	B/G, I, D/K, H, L, M/N
Output level	>110 dBuV
Attenuator	0..-31 dB, step 1 dB
Spurious signals suppression	>60 dB
Picture carrier frequency	47 ..860 MHz
Video modulation	VSB AM, Negative or Positive
Stereo sound NICAM	
NICAM carrier	5.850 MHz, 6.552 MHz
Mono sound	
Subcarrier frequency	4,500 MHz, 5,500 MHz, 6,000 MHz and 6,500 MHz
Modulation type	FM or AM
Modulation signal	Frequency, level and shape adjustable

See „Owner's Manual” for detail instructions, please.

2. Test Patterns


The generator is provided with set of primary patterns and extended patterns. Primary patterns are not system dependent, thus it can be displayed in TV systems with vertical frequency 50 Hz (625 lines) and also with vertical frequency 60 Hz (525 lines). Extended patterns are system specific and can be displayed only in TV system that was selected during pattern design (either 50 Hz/ 625 lines or 60 Hz/ 525 lines).

There is no special request for patterns used by HDMI/DVI and MPEG generator. For both primary and extended patterns the pattern description is processed by separate way to avoid decimation required by analog systems.


All patterns can be modified or designed by user. *Note: Your distributor can mark some patterns as fixed. This patterns cannot be modified until the mark is removed.*

Use TRF Manager software for pattern design (or modification) and for transfer to the generator. Integrated pattern designer allows you to design your own patterns in a few minutes. The CD also contain a lot of patterns ready for use, including specialized PAL/ NTSC patterns.

For detail information concerning the current set of patterns see the „Owner's Manual”, please. The images below show some examples of Primary patterns and on the next page are some examples of Extended patterns.

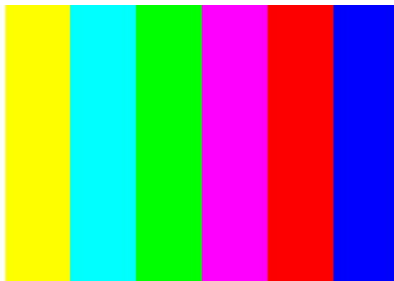


Color bars

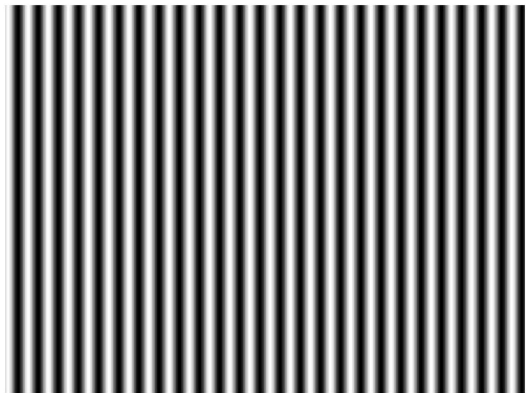


Frequency (sin wave)




Gradient (Blue 100%-0%)

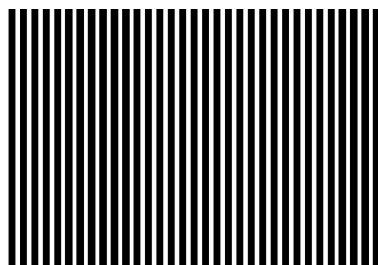

Rectangular pulses

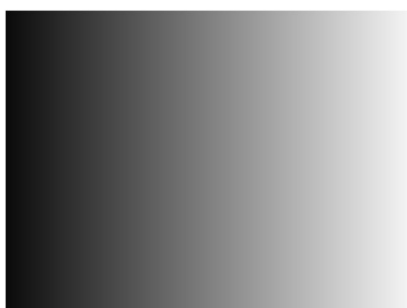


Gradient (Grey 0%-100%)

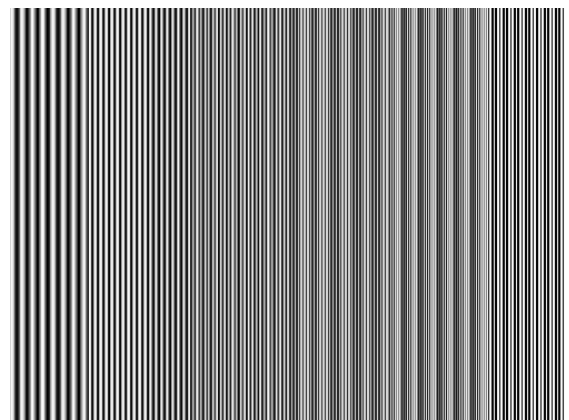


Multiburst 1.0/1.9/2.7/3.4/4.5/6.8 [MHz]



NTSC, SECAM

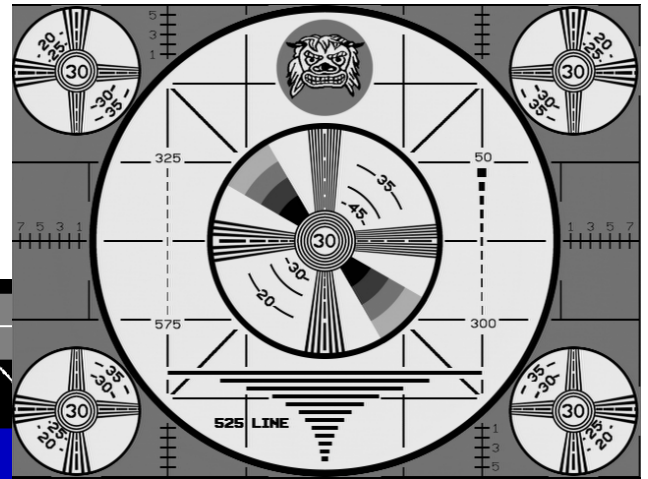

User

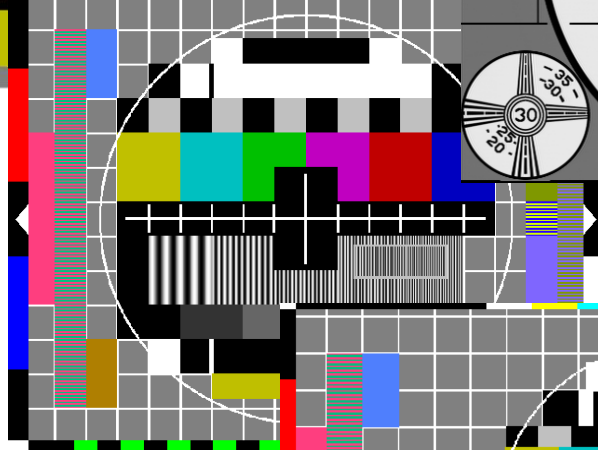

PAL

User



PAL 16:9



Important note

Default (factory) set of patterns is free for use in all countries. Be aware that some test patterns (available from third parties for example) may be copyrighted in some countries. The generator manufacturer carry no responsibility for the patterns provided or used by the customer.

2.1 Motion simulation

The generator provide high quality static test patterns by default. To meet a requirements of some applications for dynamic patterns, the generator has function that simulate motion. If the function is enabled, the static pattern start to move horizontally from left to right and vice versa. The motion speed can be set to Slow, Medium or Fast.

3. Other features

This instrument has a lot of features, that should meet the most of application's requirements and should simplify the operations. This cover functions like Line Gate, that provide sync. signal at selected line (selected line is also highlighted on pattern!) and other. For detail information see the Owner's manual, please.

The sections below describes data transmission inside VBI (Wide Screen Signalling, Teletext, Closed Captions and VPS). All the functions can be enabled or disabled separately for the analog outputs.

3.1 Wide screen signalling

This function use first half of line 23 for information about pattern format. There is about 8 different settings (the default data can be modified by TRF Manager, including mode, etc.).

3.2 Teletext

The generator provides enhanced teletext signal according to the ETS300706 standard. The bitrate is 6.9375 Mbps. Teletext data are transmitted inside selected lines during vertical blanking interval. The user can specify what lines (and what fields) can carry the telex data.

The instrument contain set of the most popular teletext pages. If you need to create your own teletext pages, use „TRF Manager” software.

This tool enables you to edit teletext pages at different levels: from single byte editing up to visual design. Visual mode is the simplest way how to create new teletext pages in a few minutes. Advanced designers can use also packet editors. The page can contain all items and objects introduced by the ETS 300-706 teletext specification.

Number of teletext pages is limited only by available memory. There is a lot of space for more than hundred standard teletext pages. In any case the TRF Manager inform you what amount of memory is free.

Note: The teletext can also carry PDC (Program Delivery Control) data according to the ETS300-231 standard.

3.3 Closed captions

This feature allows transmission of closed captions or extended data inside line 21. This is primarily intended for NTSC-M TV system, but can be also used in systems with vertical frequency 50 Hz. The bitrate is 0.504 Mbps for NTSC-M and other standards with vertical frequency 60 Hz, or 0.5 Mbps for standards with vertical frequency 50 Hz.

Data are transmitted by two bytes per field, each preceded by run-in clocks and framing code. User can select filed (odd, even or both) for data transmission.

From the factory the generator contain basic closed caption test strings. By using the TRF Manager software, the user can design his own closed captions and edit the data at byte (character) level.

3.4 VPS

The VPS system is used by European and other countries to control VCRs. Data format is the same as in case of PDC. The bytes 5, 11, 12, 13 and 14 can be modified by user. Data are transmitted in line 16.

4. Conditions and safety

The generator is designed for desktop use or for use inside 19" Rack systems. The instrument is calibrated at temperature of 25 degrees Celsius (operating temperature range is 15..35 degree Celsius) and can be used up to 80% humidity. Do not splash it or clean with water, solvents etc. Use only dry antistatic duster for cleaning. Don't touch connectors pins.

This instrument is powered by certified safety transformer. The transformer is either built in (AC version) or external (DC versions). When connected to mains, the generator enter standby mode (power indicator lit). If the generator is not used for longer time, disconnect it from mains.

Important note: Metallic parts (panels) are not connected to PE pin.

4.1 Connection and safe operation

All output and input connectors have common ground -the connectors are thus interconnected (i.e. ground and shielding of each connector is connected to all other connectors). Be very careful when connecting to this instrument more devices. Never connect devices with different ground potential, with different voltage between shieldings or with potential between ground and shielding.

Do not connect the generator to unsafety devices (galvanically connected to mains, etc.)!

This is also important when connecting the generator to PC. Keep in mind that the generator connected to PC is also connected to it's ground.

Always think of your safety to avoid some accident or damage caused by improper connection. Keep also all known rules for safe work with electric instrument.

4.2 Legal notice

This product and software is not designed for use in life support applications or applications where malfunction of this product or software can result in personal injury or material damage. The Epsilon company is not responsible for any such damage and for the damages caused by improper product use.

The information in this document and in Owner's manual is provided in connection with Epsilon products. No license to any intellectual property right is granted by this document or in connection with the sale of Epsilon products.

Products that use or comply with some third-party registered or protected standard or technology may require licensing in some countries. The customer is solely responsible for product use according to the laws valid in his country. Epsilon company has no responsibility.

This document, Owner's manual, menus, etc. can contain terms and product names that may be trademarks of others.

All specifications are subject to change without notice.

Annex A Input & Output Connectors And Typical Signals

• Analog Red, Green, Blue

Connector type: BNC female
 Impedance: 75 Ohm
 Voltage: 0.7Vpp (at 75 Ohm resistive load)
 Inequality of output signal voltages: 2%
 Polarity: Positive
 Coupling: DC
 Blanking level: 0 V
 Offset: 100 mV
 Gain (Y,C): Programmable

• Analog C_R, Y, C_B

Connector type: BNC female (alternative function of Red, Green and Blue output)
 Impedance: 75 Ohm
 Voltage Y: 1 Vpp (at 75 Ohm resistive load)
 Voltage C_R, C_B: 0.7 Vpp (at 75 Ohm resistive load)
 Inequality of output signal voltages: 2%
 Coupling: DC
 Blanking level: 0 V
 Offset: 100 mV
 Gain (Y,C): Programmable

• Analog Y, C

Connector type: BNC female
 Impedance: 75 Ohm
 Voltage Y: 1 Vpp (at 75 Ohm resistive load)
 Voltage C: 0.85 Vpp (at 75 Ohm resistive load)
 Inequality of output signal voltages: 2%
 Coupling: DC
 Blanking level: 0 V
 Offset: 100 mV
 Note: Level is programmable together (see CVBS)

• Analog CVBS

Connector type: BNC female
 Impedance: 75 Ohm
 Voltage: 1 Vpp (at 75 Ohm resistive load)
 Range: 0 - 1.2 V
 Resolution: <10 mV
 Polarity: Positive
 Coupling: DC
 Offset: 100 mV
 Y/C delay: <40 ns (programmable)
 Black, blanking and burst level: Programmable
 Burst position: Programmable
 Chroma subcarrier: 3.5 MHz, programmable
 White-to-black: 92.5 or 100 IRE

• DV 601/656 Port

Connector type: D-Sub 15 pin (female)
 Level: LVTTTL (3.3V)
 Data format: 8 bit parallel, 4:2:2, ITU-BT.656/601
 Pin 1: Data Clock
 Pin 9: GND
 Pin 2: Line Gate (programmable)
 Pin 10: Field (0..first, 1..second)
 Pin 3: V-Sync (position programmable)
 Pin 11: H-Sync (position programmable)
 Pin 4: GND
 Pin 12: D7
 Pin 5: D6
 Pin 13: D5
 Pin 6: D4
 Pin 14: D3
 Pin 7: D2
 Pin 15: D1
 Pin 8: D0

• Audio In, Out

Connector type: Jack 3.5mm stereo (female)
 Level: see Technical specification
 Output Signal: min. 300 Hz - 5 kHz, programmable shape and level

• USB

Connector type: USB type B
 Version and driver: see Technical specification

• Control Port

Connector type: D-Sub 15 pin (female)
 Pin 1: Main +5V/50 mA (available also when power is off)
 Pin 9: RS-232 Enable (0 or NC..disabled, 1..Enabled)
 Pin 2: Connected to pin 1
 Pin 10: GND
 Pin 3: Generator TX (connect to RS-232 RX input)
 Pin 11: GND
 Pin 4: Generator RX (connect to RS-232 TX output)
 Pin 12: GND
 Pin 5: +5V/50 mA (when power is on)
 Pin 13: GND
 Pin 6: +3V/30mA (when power is on)
 Pin 14: Control output (Optocoupler, Emitter, $V_{CE} < 20V$)
 Pin 7: Control output (Optocoupler, Collector, $I_{max} = 20mA$)
 Pin 15: Control input (Optocoupler, Cathode, $U_{ctrl} 0V/3..9V$)
 Pin 8: Control input (Optocoupler, Anode, I_{fw} limited)

RS-232 Interface: Baud rate 9600 bps (programmable)
 8 data bits, 1 start bit, 1 stop bit, odd parity

- **HDMI**

Connector type: HDMI type A, 19 pin, standard connection
Other: Hot Plug Detect

- **DVI-I**

Connector type: DVI female, 29 pin, standard connection
Other: H/V Sync., analog R-G-B


- **TS (PS) Parallel**

Connector type: D-Sub 25 pin (female), connection according to
DVB document A010.
Other: Differential signals, LVDS synchronous interface
Pin1: CLKA
Pin14: CLKB
Pin 2: GND
Pin 15: GND
Pin 3: DATA7A
Pin 16: DATA7B
Pin 4: DATA6A
Pin 17: DATA6B
Pin 5: DATA5A
Pin 18: DATA5B
Pin 6: DATA4A
Pin 19: DATA4B
Pin 7: DATA3A
Pin 20: DATA3B
Pin 8: DATA2A
Pin 21: DATA2B
Pin 9: DATA1A
Pin 22: DATA1B
Pin 10: DATA0A
Pin 23: DATA0B
Pin 11: DATA VALID A
Pin 24: DATA VALID B
Pin 12: SYNCA
Pin 25: SYNCB
Pin 13: NC

Annex B Analog CVBS, S-Video and RGB outputs

The pattern generator provide signals with direct-current component at analog outputs. Typical offset is about 100 mV, amplitude swing is dependent on current generator setup. Load impedance is 75 Ohm and have to be realized in form of resistive load by convention.

Figure (a) below show recommended load connection for applications, where direct-current component is required. Figure (b) show recommended load connection for applications, that don't need direct-current component (it is separated by capacitor „C”).

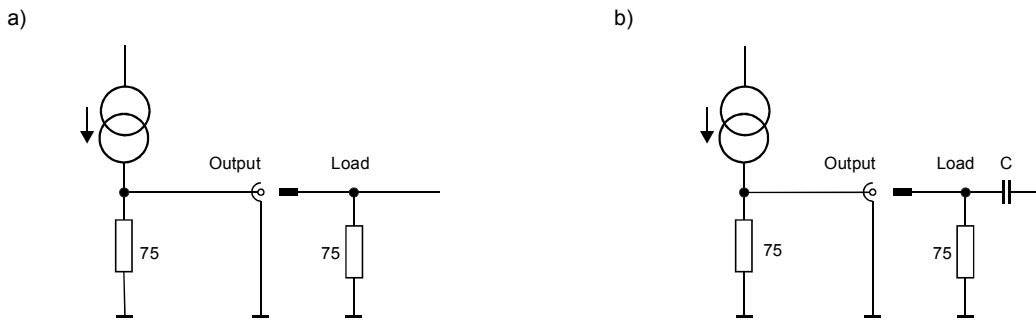


Load connection to analog output: DC component preserved (a), DC component separated (b)

Signal levels

Levels of analog TV baseband signal can be given either in absolute units (for example in Volts) or in relative units. Television technology often use well known relative unit IRE, established by Institute of Radio Engineers (IEEE ancestor).

The figure below show simple composite video baseband signal with total swing 143 IRE and 7,5 IRE black setup (no chrominance signal is visible). White is always defined to be 100 IRE above the blanking level (blanking level is defined to be 0 IRE).

Note: There are many television standards and substandards that don't use the 7,5 IRE setup and put the black level at blanking level.

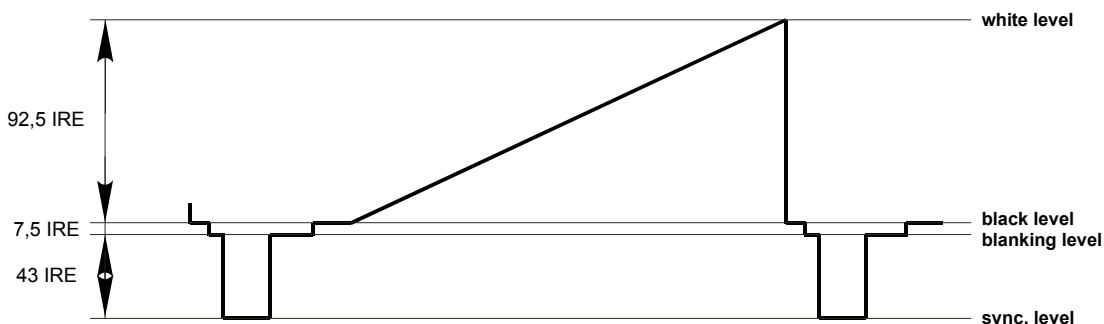

Main levels of analog composite video baseband signal (without chrominance, total swing 143 IRE, black setup 7.5 IRE above blanking level)

Annex C TRF-958, Ordering information

TRF-958 [Modulator(s)] [Other options]

- MPEG2 TS (PS) Parallel Output
(Or LVTTTL & I2S Digital Audio interface on special request)
- HDMI Output, DVI-I Output
- All Analog Video Outputs
- Digital Video Output (DV 601/656)
- USB, Control Port, Audio
- One Flash disk for patterns and data
- DC version 12.5-16V incl. external power adapter (switching type, input: 100-240V)

Other applicable options

FD2 (FD3, FD4) ...2, 3 or 4 Flash disks

AC240 ...AC version 220-240V/ 50..60Hz
(built in transformer)

(AC version 110-120 V/50-60 Hz available on special request)

DVB-T/ce¹

DVB-T modulator

Price effective version (see datasheet, please)

DVB-C/ce¹

DVB-C modulator

Price effective version (see datasheet, please)

DVB-S/ce¹

DVB-S modulator

Price effective version (see datasheet, please)

DVB-T¹

DVB-T modulator

DVB-C¹

DVB-C modulator

DVB-S¹

DVB-S modulator

NICAM¹

TV RF modulator NICAM + AM/FM

Note 1: Up to two modulators can be installed in single unit.

Note 2: In case of any other requests (custom module, customized version, etc.) contact us, please.

Notes

Epsilon
The World of Electronics

www.epsilon.com

Fax: (+420) 284862414

P.O. Box 43, Konevova 223, 130 04 Prague 3
Czech Republic, EU